


Synology DS223 NAS

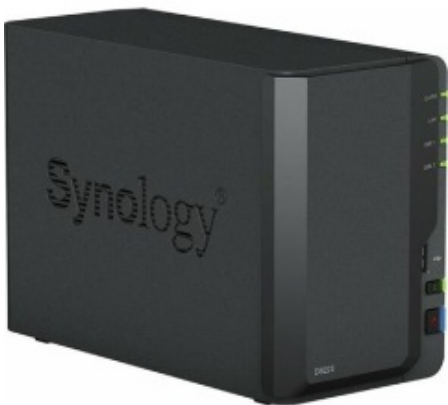

Realtek RTD1619 (4×1,7GHz), 2GB, DDR4, beépíthető meghajtók száma: 2db, 3,5", SATA3, RAID: RAID 0, 1, JBOD, USB3.0: 3db, LAN (1Gb/s): 1db, fekete

Cikkszám: DS223

Ár:

150 810 Ft

Garancia: 2 Év

CPU	CPU Model	Realtek RTD1619B		
	CPU Quantity	1		
	CPU Architecture	64-bit		
	CPU Frequency	4-core 1.7 GHz		
Memory	Hardware Encryption Engine			
	System Memory	2 GB DDR4 non-ECC		
	Notes	Synology reserves the right to replace memory modules with the same or higher frequency based on supplier's product life cycle status. Rest assured that the compatibility and stability have been strictly verified with the same benchmark to ensure identical performance.		
Storage	Drive Bays	2		
	Compatible Drive Type* (See all supported drives)	<ul style="list-style-type: none">3.5" SATA HDD2.5" SATA SSD		
	Hot Swappable Drive*			
	Notes	"Compatible drive type" indicates drives that have been tested to be compatible with Synology products. This term does not indicate the maximum connection speed of each drive bay.		
External Ports	RJ-45 1GbE LAN Port*	1		
	USB 3.2 Gen 1 Port*	3		
	USB / SD Copy			
	Notes	<ul style="list-style-type: none">This device's 1GbE LAN ports have a maximum transmission unit (MTU) size of 1,500 bytes.The USB 3.0 standard was renamed to USB 3.2 Gen 1 by the USB Implementers Forum (USB-IF) in 2019.		

File System	Internal Drives	<ul style="list-style-type: none">• Btrfs• EXT4
	External Drives	<ul style="list-style-type: none">• Btrfs• EXT4• EXT3• FAT• NTFS• HFS+• exFAT
Appearance	Size (Height x Width x Depth)	165 mm x 108 mm x 232.7 mm
	Weight	1.28 kg
Others	System Fan	92 mm x 92 mm x 1 pcs
	Fan Speed Mode	<ul style="list-style-type: none">• Full-Speed Mode• Cool Mode• Quiet Mode
	Brightness Adjustable	
	Front LED Indicators	
	Power Recovery	
	Noise Level*	14.6 dB(A)
	Scheduled Power On / Off	
	Wake on LAN / WAN	
	Power Supply Unit / Adapter	60 W
	AC Input Power	100V to 240V AC
	Voltage	
	Power Frequency	50/60 Hz, Single Phase
	Power Consumption	17.343 W (Access)
	British Thermal Unit	4.08 W (HDD Hibernation)
		59.19 BTU/hr (Access)
Temperature	Operating Temperature	0°C to 40°C (32°F to 104°F)
	Storage Temperature	-20°C to 60°C (-5°F to 140°F)
Certification	Relative Humidity	5% to 95% RH
		<ul style="list-style-type: none">• FCC
		<ul style="list-style-type: none">• CE
		<ul style="list-style-type: none">• BSMI
		<ul style="list-style-type: none">• VCCI
		<ul style="list-style-type: none">• RCM
		<ul style="list-style-type: none">• UKCA
Notes		
<ul style="list-style-type: none">• For more information on how power consumption is measured, refer to this article.• Noise testing was conducted with the Synology system fully installed with Synology SATA SSDs and in an idle state. Two G.R.A.S. type 40AE microphones were placed at a 1 m distance from the front and rear of the device. Background noise: 16.49-17.51 dB(A); Temperature: 24.25-25.75°C; Humidity: 58.2-61.8%.		

	<ul style="list-style-type: none"> EAC CCC KC
Warranty	2-year hardware warranty, extendable to 4 years with Extended Warranty Plus <ul style="list-style-type: none"> Availability varies by region. Before purchasing, please visit the official web pages of EW201/202 and Extended Warranty Plus for a list of eligible regions. The warranty period starts from the purchase date as stated on your purchase receipt. (Learn more)
Notes	
Environment	RoHS Compliant
Packaging Content	<ul style="list-style-type: none"> Main Unit X 1 Accessory Pack X 1 AC Power Adapter X 1 AC Power Cord X 1 RJ-45 LAN Cable X 1 Quick Installation Guide X 1
Optional Accessories	<ul style="list-style-type: none"> 3.5" SATA HDD: HAT5300 2.5" SATA SSD: SAT5210 VisualStation: VS360HD Surveillance Device License Pack

LAN (1Gb/s)	1
Gyártó	Synology
beépítési méret	3,5"
beépíthető meghajtók száma	2
belső csatlakozó	SATA3
fogyasztás	17,35
memória foglalát típusa	DDR4
memória maximális mérete	2
processzor	Realtek RTD1619 (4×1,7GHz)
RAID	RAID 0, 1, JBOD
tömeg	1.28 kg
USB3.0	3
szín	fekete