


LG 75UH5J-M New High Haze Signage 24/7 75" IPS LED
smart LFD monitor fekete 120Hz

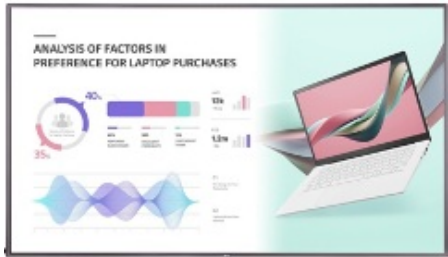

75", 3840x2160, 120Hz, 16:9, 500cd/m2, 1000:1, 6ms, USB2.0, DVI-D, HDMI, DisplayPort, fejhallgató kimenet, LAN, Wi-Fi, Line-In, PIP/PBP, hangszóró, falra szerelhető (VESA), portré mód (pivot), 230W, FELÁRAS HÁZHOZSZÁLLÍTÁS

Cikkszám: 75UH5J-M

Ár:

773 630 Ft

Garancia: 3 Év

- Panel

Screen Size	75"
Panel Technology	IPS
Back Light Type	Edge
Aspect Ratio	16 : 9
Native Resolution	3,840 x 2,160 (4K UHD)
Refresh Rate	120 Hz
Brightness	500 nit (Typ.)
Contrast Ratio	1,000 : 1
Dynamic CR	1,000,000 : 1
Color gamut	NTSC 72%
Viewing Angle (H x V)	178 × 178
Color Depth	1.07 Billion Colors (10 bit (D))
Response Time	6 ms (G to G)
Surface Treatment	28%
Life Time (Typ.)	50,000 Hrs
Operation Hours (Hours / Days)	24 / 7
Portrait / Landscape	Yes / Yes

- Mechanical Specification

Bezel Color	Black
Bezel Width	14.9 mm (Even Bezel)
Weight (Head)	41.5 kg
Packed Weight	51.2 kg
Monitor Dimensions (W × H × D)	1,682.4 × 960.3 × 57.9 mm (without Handle and LG Logo)
Carton Dimensions (W × H × D) (Box Outer Size)	1,816 × 1,123 × 228 mm
Handle	Yes
VESA™ Standard Mount Interface	600 × 400 mm

- Environment Conditions

Operation Temperature	0°C to 40°C
Operation Humidity	10% to 80%

- Power

Power Supply	AC 100-240 V ~, 50/60 Hz
Power Type	Built-in Power

- Power Consumption

Typ./Max.	170 W / 230 W
Smart Energy Saving	120 W
DPM	0.5 W
Power off	0.5 W
BTU (British Thermal Unit)	581 BTU/Hr (Typ.), 785 BTU/Hr (Max.)

- Certification

Safety	CB / NRTL
EMC	FCC Class "A" / CE / KC
ErP / Energy Star	Yes (NewErP) / Yes

- OPS Compatibility

OPS Type Compatible	Yes
OPS Power Built In	No

- Software Compatibility

SuperSign CMS, SuperSign Control+, SuperSign WB, SuperSign Cloud, Mobile CMS, LG Connected Care)

- Connectivity

Input	HDMI (3 (HDMI1/2 : HDCP 2.2/1.4, HDMI3 : HDCP 1.4)), DP (HDCP 2.2/1.3), DVI-D (HDCP 1.4), Audio In, RS-232C In (4 Pin Phone-jack), RJ45 (LAN), IR In, USB 2.0 (Type A)
--------------	--

Video / Audio	HDMI Out, Audio Out, RS-232C Out (4 Pin Phone-jack), Daisy Chain (Input HDMI, DP / Output HDMI)
----------------------	---

- Sound

Speaker	Yes
----------------	-----

- Language

English, French, German, Spanish, Italian, Korean, Chinese (Simplified), Chinese (Original), Portugues (Brazil), Swedish, Finnish, Norwegian, Danish, Russian, Japanese, Portugues (Europe), Dutch, Czech, Greek, Türkiye, Arabic

- Accessory

Basic	Remote Controller, Power Cord, QSG, Regulation Book, Phone to RS-232C Gender
Optional	OPS Kit (KT-OPSF), LSW640A/B (Wall Mount)

- Special Feature

Conformal Coating (Power Board)

- Key Feature

Internal Memory (eMMC) 16 GB, Built-in Wi-Fi, Sensor (Temperature Sensor, Auto Brightness Sensor, Acceleration (Gyro) Sensor), Local Key Operation, Built-in Speaker, webOS 6.0, Local Contents Scheduling, Group Manager, USB Plug & Play, Fail Over, Image (Booting Logo Image, No Signal Image), Sync (RS-232C Sync, Local Network Sync), PIP, PBP (4), Screen Share, Video Tag (4), Play via URL, Rotation (Screen Rotation, External Input Rotation), Gapless Playback, Tile Mode Setting (Max. 15 × 15), Setting Data Cloning, SNMP, ISM Method, Auto Set ID, Status Mailing, Control Manager, Crestron Inside, Smart Energy Saving, PM Mode, Wake on LAN, Network Ready, Beacon, HDMI-CEC), SI Server Setting, webRTC, Pro:Idiom