

StarTech 4-Bay 2.5/3.5" USB3.0 SATA dokkoló

beépíthető meghajtók száma: 4db, USB3.0, SATA: 4db, külső tápegység

Cikkszám: SDOCK4U33

Ár:

120 490 Ft



The SDOCK4U33 four-bay 2.5/3.5" SATA HDD / SSD docking station lets you dock and swap four drives from your desktop or laptop computer simultaneously, using a single USB port.

Get the most out of your SATA III (Gbps) solid state drives and hybrid drives with this UASP (USB Attached SCSI Protocol) enhanced hard drive docking station. With performance up to 70% faster than conventional USB 3.0 when paired with a UASP-enabled host controller, UASP ensures high performance by reducing bottleneck. See our UASP testing results below for further details.

The hard drive dock features independently-powered SATA connectors for each individual drive, ensuring you can operate drives separately. This gives you the freedom to hot-swap one drive while transferring data to another, saving you time. Plus, the built-in fans keep your drives running cool, ensuring optimal performance and helps to prevent premature drive failure.


Extend the value of this hard drive docking station further with the addition of our **SATA to IDE Hard Drive Adapter (SAT2IDEADP)**, allowing easy insertion of any 2.5 or 3.5in. IDE hard drive into a SATA hard drive dock.

To ensure compatibility with your computer system, the SDOCK4U33 supports all of the leading operating systems, including: Microsoft Windows® (8/7/Vista/XP/Server 2008/Server 2003), Apple® OSX (10.9/10.8/10.7/10.6), Linux, and Google Chrome OS™.


SDOCK4U33 is backed by a StarTech.com 2-year warranty and free lifetime technical support.

Improved Performance with UASP

UASP is supported in Windows 8, Mac OSX (10.8 or above), and Linux. In testing, UASP performs with a 70% faster read speed and 40% faster write speed over traditional USB 3.0 at peak performance.

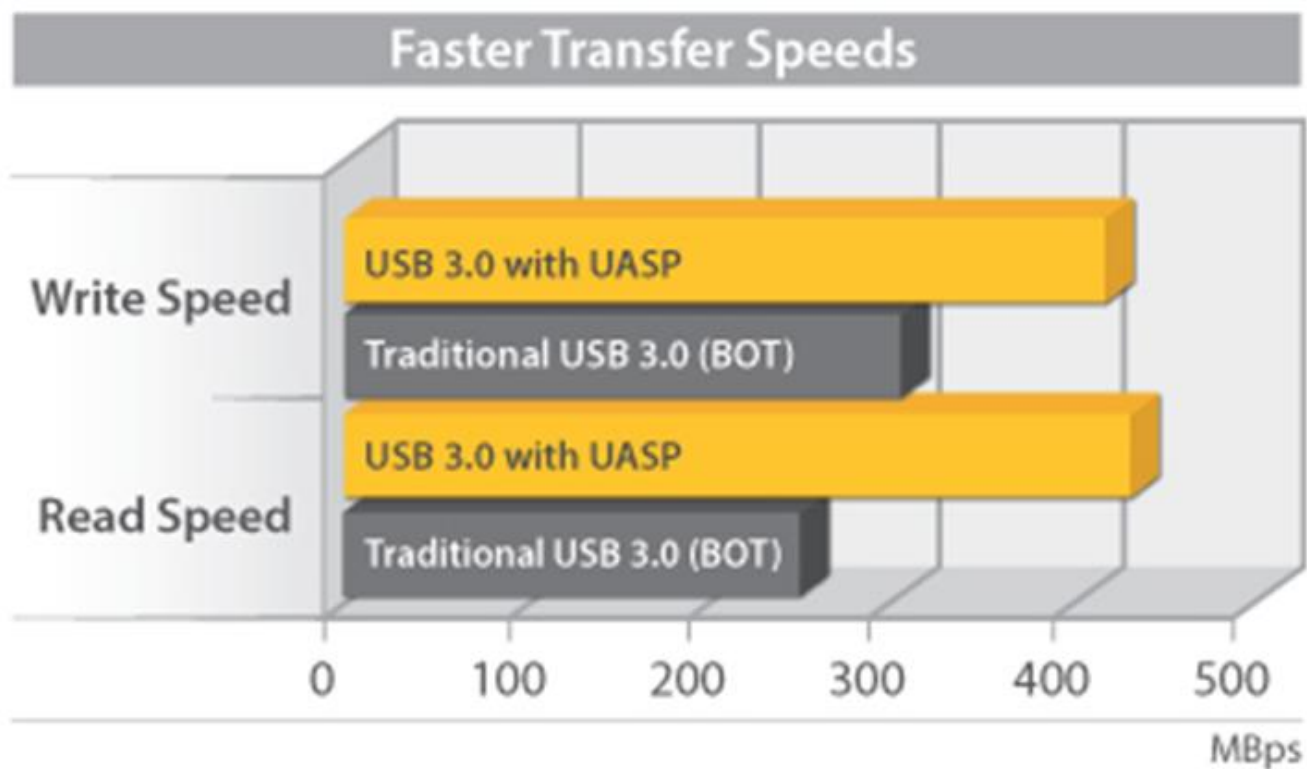

At the same peak in testing UASP also shows an 80% reduction in required processor resources.

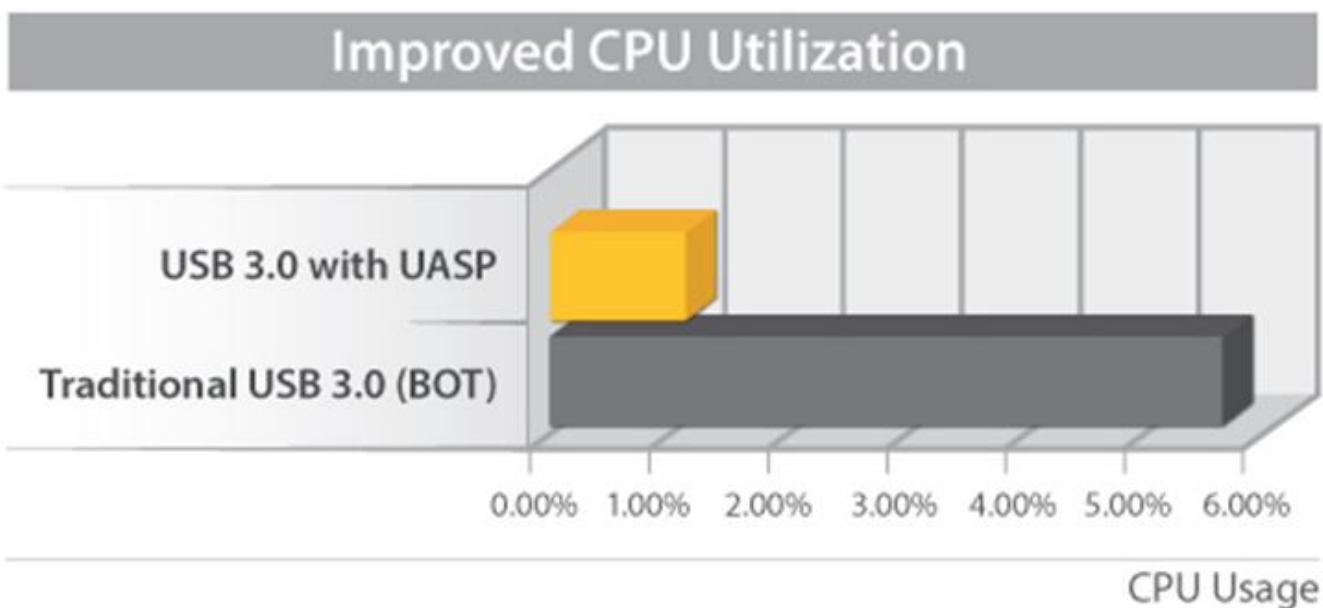

Testing results were obtained using an Intel® Ivy Bridge system, a UASP-enabled StarTech.com Enclosure, and a SATA III solid state drive.

Hardware

Chipset ID	VL812+ASM1053E
Compatible Drive Types (Type and Rate)	SATA
Drive Installation	Removable
Drive Size	2.5in & 3.5in
Fan(s)	Yes
Fans	2 - 40 mm
Interface	USB 3.0
Number of Drives	4

Performance

Insertion Rating	15,000 Cycles
Max Drive Capacity	Currently tested with up to 4TB 7200 RPM 3.5" hard drives per bay (8TB total) and 2TB 5900 RPM 2.5" hard drives (2TB total)
Type and Rate	USB 3.0 - 5 Gbit/s
UASP Support	Yes

Connector(s)	
Drive Connectors	4 - SATA Data & Power Combo (7+15 pin) Receptacle
Host Connectors	1 - USB Type-B (9 pin) USB 3.0 Female
Software	
OS Compatibility	OS independent; No software or drivers required
Indicators	
LED Indicators	4 - Drive power/activity LED
Power	
Input Current	2.5A
Input Voltage	100 ~ 240 AC
Output Current	6.5 A
Output Voltage	12 DC
Power Source	AC Adapter Included
Environmental	
Humidity	20%RH ~ 80%RH
Operating Temperature	5°C to 35°C (41°F to 95°F)
Storage Temperature	-20°C to 50°C (-4°F to 122°F)
Physical Characteristics	
Color	Black
Enclosure Type	Plastic
Product Height	3.3 in [85 mm]
Product Length	11.2 in [285 mm]
Product Weight	36.5 oz [1035 g]
Product Width	6.7 in [171.2 mm]
Packaging Information	
Shipping (Package) Weight	76.9 oz [2179 g]
What's in the Box	
Included in Package	1 - USB 3.0 4-Bay 2.5/3.5" SATA SSD/HDD Dock
	1 - USB 3.0 Cable
	1 - Universal power adapter (NA/EU/UK/AUS)
	1 - Instruction manual